



WStar Lighting Industry Pty Ltd
Let there be light



Ip65 LED BATTEN

WSLI PLUTO LED VAPO PROOF




Item No	Voltage	Power	LM	LM/W	CRI	Dimensions
WSLI-118DL	220-240V 50/60Hz 110-277V 50/60Hz	10W	1300LM	130LM/W	≥80	660x82x82mm
WSLI-218DL	220-240V 50/60Hz 110-277V 50/60Hz	20W	2600LM	130LM/W	≥80	660x115x82mm
WSLI-136DL	220-240V 50/60Hz 110-277V 50/60Hz	20W	2600LM	130LM/W	≥80	1260x82x82mm
WSLI-236DL	220-240V 50/60Hz 110-277V 50/60Hz	40W	5200LM	130LM/W	≥80	1260x115x82mm
WSLI-158DL	220-240V 50/60Hz 110-277V 50/60Hz	30W	3900LM	130LM/W	≥80	1560x82x82mm
WSLI-258DL	220-240V 50/60Hz 110-277V 50/60Hz	60W	7800LM	130LM/W	≥80	1560x115x82mm

Technical data tolerance: ±10%

Product details



- ABS base+PC cover or PC base+PC cover
- Steel or aluminum reflector inside
- With clips design: PC clips or stainless steel clips
- LM-80 LED SMD inside
- PHILIPS/BOKE/TRIDONIC/LIFUD etc driver inside
- Up to 150LM/W
- Serially linkable
- Emergency/dimming/DALI/sensor/CCT select/power select optional
- Suitable for underground parking,hospital,factory,warehouse,corridor etc

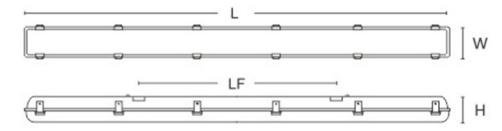

Performance



Certificate

