

POST AREA LIGHTING

Feature


- LED lifespan 100 000hrs
- Luminous efficacy 150Lm/W
- 6kV surge protection
- Constant current led driver



Product description:

Die casting aluminum housing, aluminum cover
Indirect lighting technology
UV- Anti PC lamp cover
Transparent matte avoid glaring
Sealed Lamp housing
Support integrated LED PCBs
Support LED bulb E40 E27...
Prismatic /Opal & Clear Diffuser

Product Dimensions(mm)

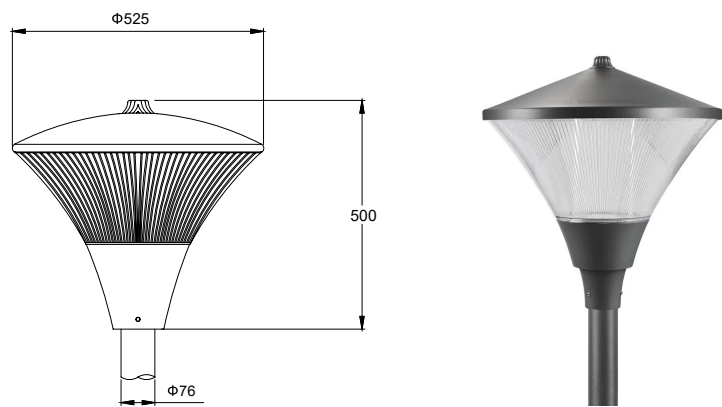

Configuration Data:

Product Code	Rated Power	LED Type	Luminous Flux	G.W/N.W	Packing Size	Loading Qty
WSLI-ZOLA-30	30W	LED SMD / Corn Bulb	4000/5000lm	8/7(kgs)	540x540x540mm	160PCS/20'GP
WSLI-ZOLA-55	55W	LED SMD / Corn Bulb	7500/8300lm	8/7(kgs)	540x540x540mm	
WSLI-ZOLA-70	70W	LED SMD / Corn Bulb	9100/11000lm	8/7(kgs)	540x540x540mm	336PCS/40'HQ

WSLI ZOLA SERIES





LED SMD





LED BULB

Polar Diagram



Type1

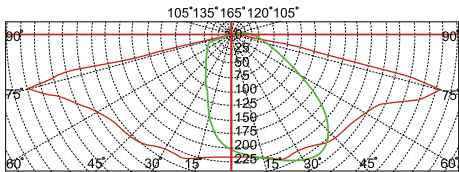

Type2

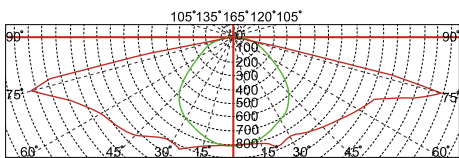

Type3

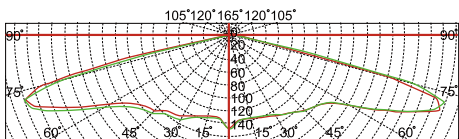

Reference color : RAL 7015  RAL 9005 

