

WSLI-ARIES-BH




1. Features:

- Use high quality LM80 SMD LEDs as lighting source
- Use high frequency driver in all models and suitable for wall and ceiling mounting.
- The color of aluminum base is available for white or black.
- The diffuser is made by a high grade of PC that meets the IK09 10J (5000g*20cm) standard.
- IP65 can be moisture proof.
- Luminous Efficiency > 100LM/W
- **Working with integral micro-wave sensor is available.**
- **Working with Emergency Version is available.**

2. Characteristics

Item	WSLI-ARIES-20W	WSLI-ARIES-30W
Power	20W	30W
LEDs	LM80 SMD LEDs	6 LM80 SMD LEDs
Lumens	2000LM	3000LM
Efficiency	100LM/W	100LM/W
Power Factor	>0.9	
Rated Volt.	100-240V AC50/60Hz	
Size	300x300x90mm	
Color Temp.	Warm White:2800-3300K; Commercial White:4000-4500K; Cool White:6000-6500K	
CRI	>80	
Beam Angle	115°	
IP Rating	IP65	
Materials	Aluminum PCB, Die-cast Aluminum , PC cover	
Working Temp.	-40℃ - 60℃	

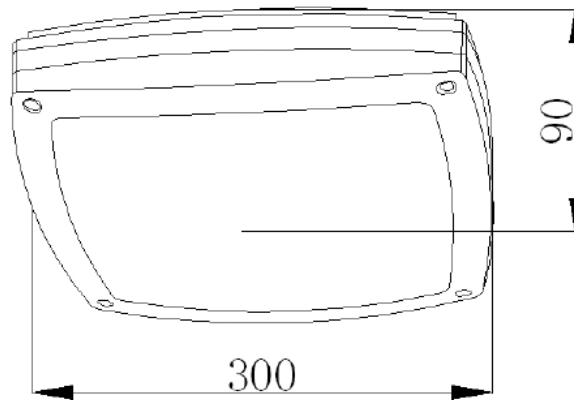


Dia-Line Drawing

3. Application



- Bathroom
- Outside corridor
- Shopping Center
- Hotel
- Stair, etc.

4. Installation Steps

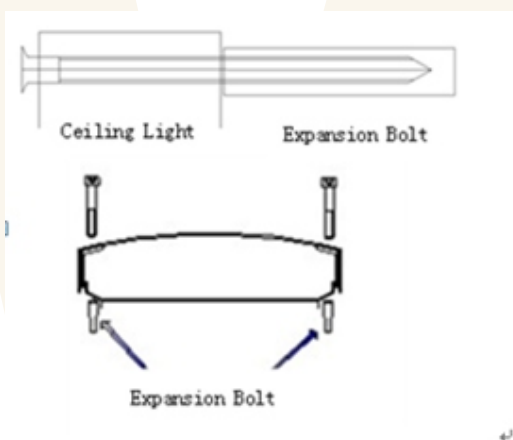

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

