

WSLI-LIBRA-BH




1. Features:

- Use high quality LM80 SMD LEDs as lighting source
- Use high quality driver in all models and suitable for wall and ceiling mounting.
- The color of Aluminum base is available for white or black.
- The diffuser is made by a high grade of PC that meets the IK09 10J (5000g*20cm) standard.
- IP65 can be moisture proof.
- Luminous Efficiency > 100LM/W
- **Working with integral micro-wave sensor is available.**

2. Characteristics

Item	WSLI-LABRA-15W/18W
Input	220-240VAC
Power	15W/18W
LEDs	LM80 SMD LEDs
Lumens	1500LM/1800LM
Efficiency	90LM/W
Power Factor	>0.9
Rated Volt.	100-240V AC50/60Hz
Size	∅ 360x160mm
Color Temp.	Warm White:2800-3300K; Commercial White:4000-4500K; Cool White:6000-6500K
CRI	>80
Beam Angle	115°
IP Rating	IP65, IK10
Materials	Aluminum PCB, Aluminum Base , PC Diffuser
Working Temp.	-40℃ - 60℃

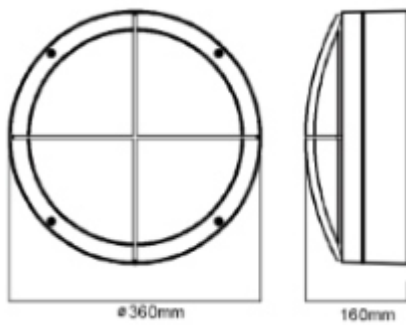

3. Application

- Bathroom
- Outside corridor
- Shopping Center
- Hotel
- Stair, etc.

