

WSLI Canopy Light Datasheet



Key Features

Efficacy: Up to 120 - 150 Lm/W

LED Chip: LUMILEDS

LED Driver: SOSEN

Surge Protection: 10kV/10kA (build in Driver)

Beam Angle: 110° Glass cover

IP Rated: IP65

Installation: ceiling/embedded

Certifications (part): ETL, DLC, CE, RoHS


Warranty: 5 years



Application

Petrol station, canopy ; Airport, supermarket, booth ; Train station, lobby ; Industry, shopping mall, indoor parking ; Park, villa, indoor tennis ground

Photometry

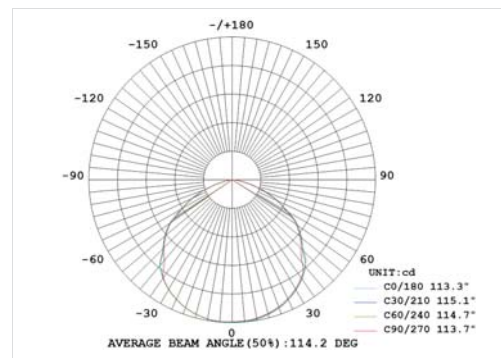

WSLI Canopy Light Datasheet

Product Data

SKU	WSLI-CP050	WSLI-CP080	WSLI-CP100	WSLI-CP150
Input Power	50W	80W	100W	150W
Lumen Output (5000K)	6,500 lm	10,400 lm	13,000 lm	19,500 lm
Certifications	CE, RoHS	ETL, DLC, CE, RoHS	CE, RoHS	ETL, DLC, CE, RoHS
Luminous Efficiency	130 lm/w			
Power Factor	0.95			
Input Voltage	100-277 VAC			
CCT	3000K/4000K/4500K/5000K/5700K/6500K			
CRI	70 CRI / 80 CRI			
LED Chip				
LED Driver				
Housing Color	White			
Material	Aluminum, Glass			
Operating temperature	-30°C to +50°C			
Operating humidity	10% to 90% RH			
Lifespan	>50,000 hours			
Warranty	5 Years			

Packaging

SKU	PCS/CTN	Net Weight	Gross Weight	Dimension Weight	CBM
WSLI-CP050	1	4.0 KG	4.6 KG	5.0 KG	L310*W310*H190 mm \approx 0.018 m ³
WSLI-CP080	1	4.5 KG	5.2 KG	5.0 KG	L310*W310*H190 mm \approx 0.018 m ³
WSLI-CP100	1	5.5 KG	6.3 KG	10.0 KG	L440*W440*H20 mm \approx 0.039 m ³
WSLI-CP150	1	6.0 KG	7.0 KG	10.0 KG	L440*W440*H20 mm \approx 0.039 m ³

WSLI Canopy Light Datasheet

Mounting


ceiling




embedded




Ordering Information

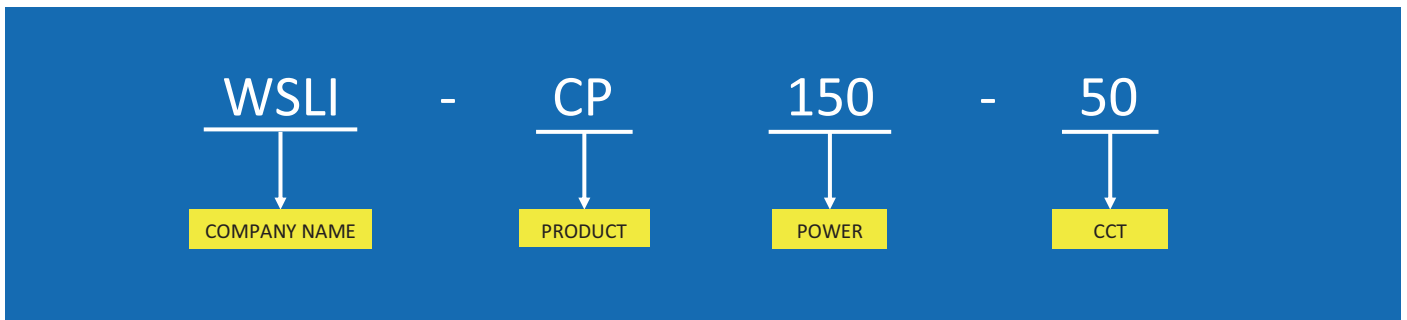


Dimension (unit: mm)

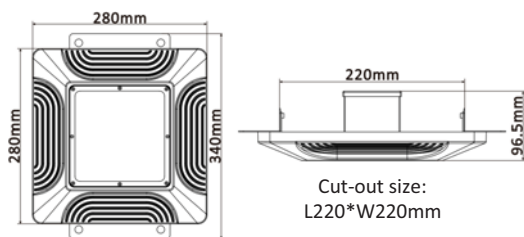


WSLI-CP050/-CP080 (embedded)

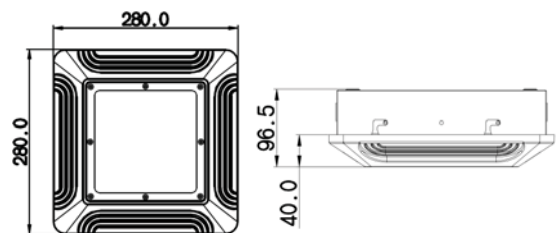

WSLI-CP050/-CP080 (ceiling)

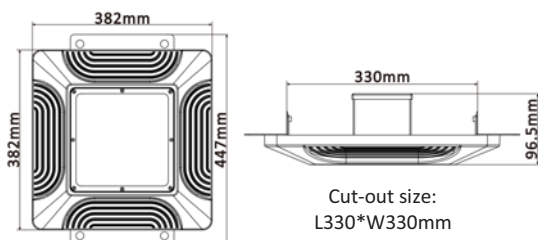

WSLI-CP100/-CP150 (embedded)

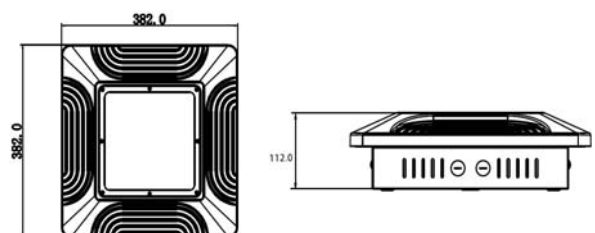

WSLI-CP100/-CP150 (ceiling)