

PAULO 4 LED STREET LANTERN



PRODUCT DESCRIPTION:

- * Three Sizes models, available from 30-240w
 - * Excellent heat radiation, optical and electrical ability
 - * Die-cast aluminum body with pure polyester Electrostatic spray
 - * With 4/5mm super white toughened glass
 - * Silicon rubber seal ring
 - * Stainless screws
 - * Humanized design concept, easy to install and maintain
 - * lamps and lantern support vertical and horizontally, adjustable angle
1. When vertical install led light, adjust angle is from 0~15°
 2. When horizontal install led light, adjust angle is $\pm 15^\circ$

STRUCTURE FEATURES:



SPECIFICATIONS:


Model Name	MOONROCK LED STREET LANTERN					
Power	30W	60W	80W	120W	150W	200W
Luminaire Flux	3600lm-4500lm	7200lm-9000lm	9600lm-12000lm	14400lm-18000lm	18000lm-22500lm	24000lm-30000lm
LED Chips	Philips Led Module (other brand of led upon request)					
Luminaire Efficacy	120-160 LM/W as optional					
CCT	4000K (2700-6500K upon request)					
CRI	70 (80 upon request)					
Lifetime	108000H (at 25°C ambient temperature)					
Operating Temperature	-30°C-55°C					
Driver	Meanwell/Inventronics (other brand of driver upon request)					
Electrical	Class I or Class II Input voltage: 100-277VAC/50-60HZ; 108-305VAC/50-60HZ 10KV/20KV SPD Cut-off connector (Power automatically switch off when opening)					
Beam angle	TYPE II, TYPE III					
Dimming	DALI / 1-10V / PWM / FIVE LEVELS DIMMING /					
Options	Photocell / Surge protection device / External cable (different length upon request)					
Color	Grey / Black / White (other color upon request)					
Tight less Level	IP66					
Impact Resistance	IK08					
Standards & Certification	ISO 9001:2015 CE / CB / ENEC / IEC / LM79 / TM21 Pending					

INSTALLATION:

"PAULO 4" LED streetlamp can be post-top or side-entry mounted

One installation pipe diameter are available: Ø60mm.

PRODUCT SIZE:

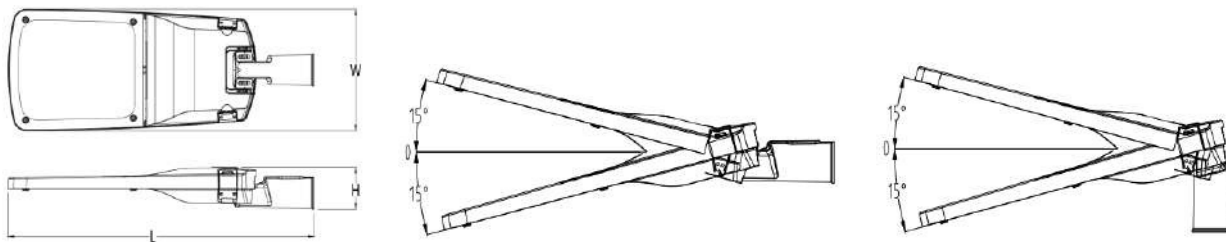


A: L*W*H 577*233*104mm

B: L*W*H 627*272*104mm

C: L*W*H 768*301*104mm

PHOTOMETRIC:

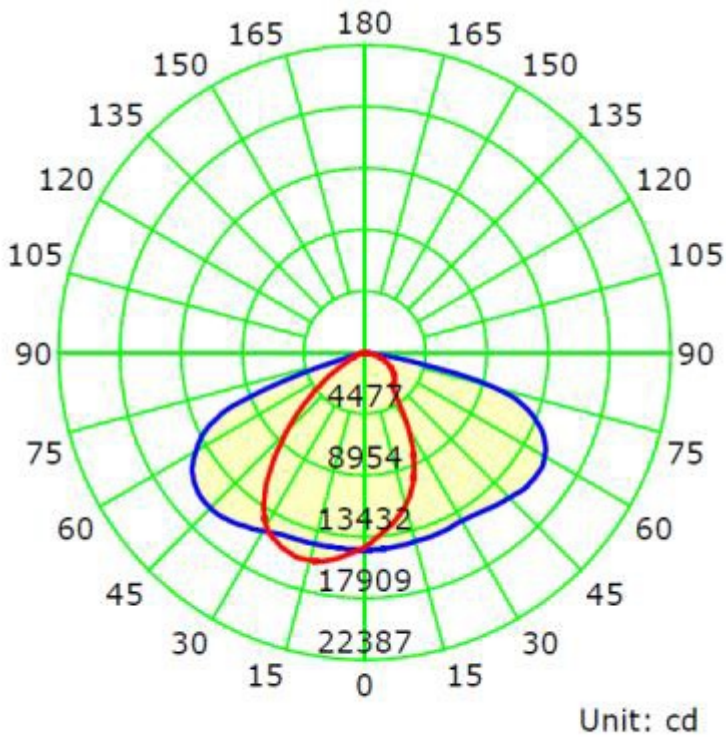

— C0-C180 — C90-C270

